



# OK-400 RTR

## 60" Dia. Drum Roll to Roll Rotary Press




Maximize productivity with the high-performance **Practix OK-400 RTR 60" Dia. Drum Rotary Press**. Built for both dye sublimation paper transfer & direct fabric fixation; with belt options of 72", 84 and 128" in width. This 60" diameter drum, high speed rotary heat transfer machine offers the latest design advancements in continuous rotary belt heat transfer printing equipment for exceptional temperature control, high transfer quality and the heaviest rollers on the market for firm and uniform pressure.

Like all Practix belt press, the OK-400RVÜ has a solid, unitized design and has a forged-steel frame for unmatched stability and dependability in even the most intense work environments. A CE mark is visible on the side of the machine.

An added benefit, the Practix OK-400RTR Roll to Roll Rotary Press is built with a 60" diameter drum providing 21 feet of transfer production per minute, running at a 40 second dwell time. A 7" touch screen interface the provides intuitive user control as well as advanced features that allows for savable settings to ensures consistent production.

All of these advances – combined with the quality, forged steel frame, one-year mechanical and electrical – make this roll to roll rotary press an unbeatable value.

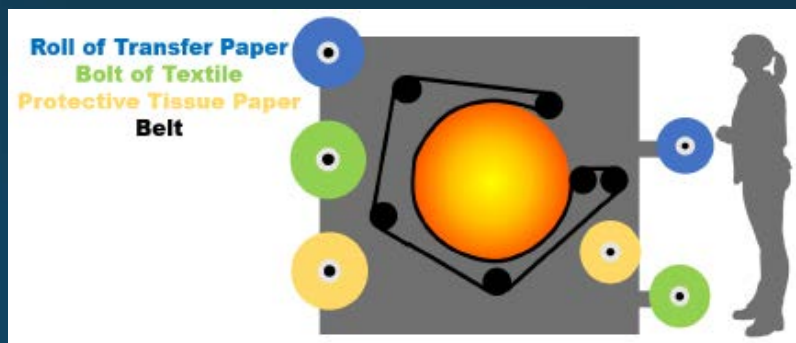

## FEATURES . . .

- 7" touch screen interface provides intuitive user control and savable settings ensures consistent production
- LARGE 60" diameter drum provides for extreme high speed transferring
- dye sublimation paper transfer & direct fabric fixation on to super wide media such as bed spreads, curtains, theatre backdrops and full width carpet
- Oil filled drum makes colors consistent side to side and job to job
- Standard Practix Heavy Duty unitized frame construction
- Multiple paper unwinds allow the use of dual narrow paper rolls to transfer full width
- Extra paper unwinds allow the use of tissue paper on top and bottom for fixation of printed fabric
- Surface rewinds for stretchy fabric production
- Highly efficient eco-friendlily heat transfer system minimizes heat up time and power consumption

### Upgrade Options:

- Powered Unwind for Stretchy Fabrics
- Fabrics Surface Rewind
- Exhaust Hood

## SPECIFICATIONS . . .

	72"	84"	128"
Belt Width	72"	84"	128"
Drum Diameter	60"	60"	60"
Electrical	74kW 255A 240V 3P	84kW 225A 240V 3P	90kW 270A 240V 3P
Weight	4800 lb	5100 lb	7300 lb
Air Supply	100 PSI 1 CFM	100 PSI 1 CFM	100 PSI 1 CFM
Dimensions (WxDxH)	140x80x110	150x80x110	190x80x110